

ETC® Install Guide

Source Four LED™ CYC Barn Door

Overview

The ETC Source Four LED CYC barn door is an attachment that installs on the front end of any Source Four LED CYC adapter. The following procedure details the installation of this attachment.

Tools required

- Phillips Screwdriver



Installation Instructions



Note: *Both the top and bottom flaps must be folded in before installing the barn door.*

- Step 1: There are two screws that ship with the barn door accessory. Locate these screws and set them aside.
- Step 2: With the flaps folded in, align the barn door accessory with the left and right edges of the CYC adapter.
- Step 3: Slide the barn door accessory onto the CYC adapter as shown.
- Step 4: Hinge the bottom flap open.
- Step 5: Using the Phillips screwdriver, install the two screws to secure the barn door in place.

Screws must be fully tightened below the lower edge of the CYC adapter to secure the barn door in place and allow full movement of the bottom flap.

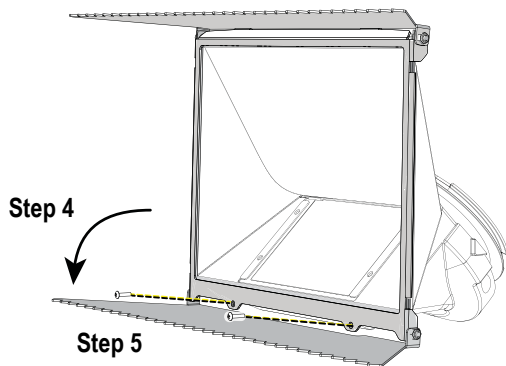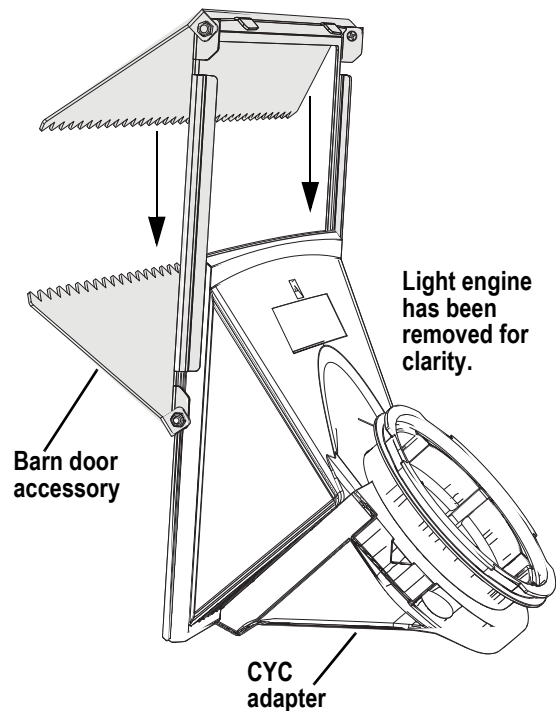

Note: *The bottom flap of the barn door will give a hard-cut edge while the top flap is intended to be used for glare control only.*



Corporate Headquarters ■ 3031 Pleasant View Road, P.O. Box 620979, Middleton, Wisconsin 53562-0979 USA ■ Tel +608 831 4116 ■ Fax +608 836 1736
 London, UK ■ Unit 26-28, Victoria Industrial Estate, Victoria Road, London W3 6UU, UK ■ Tel +44 (0)20 8896 1000 ■ Fax +44 (0)20 8896 2000
 Rome, IT ■ Via Pieve Torina, 48, 00156 Rome, Italy ■ Tel +39 (06) 32 111 683 ■ Fax +44 (0) 20 8752 8486
 Holzkirchen, DE ■ Ohmstrasse 3, 83607 Holzkirchen, Germany ■ Tel +49 (80 24) 47 00-0 ■ Fax +49 (80 24) 47 00-3 00
 Hong Kong ■ Rm 1801, 18/F, Tower 1 Phase 1, Enterprise Square, 9 Sheung Yuet Road, Kowloon Bay, Kowloon, Hong Kong ■ Tel +852 2799 1220 ■ Fax +852 2799 9325
 Service: (Americas) service@etconnect.com ■ (UK) service@etceurope.com ■ (DE) techserv-hoki@etconnect.com ■ (Asia) service@etcasia.com
 Web: www.etconnect.com ■ Copyright © 2013 ETC. All Rights Reserved. ■ Product information and specifications subject to change.
 7460M2130 ■ Rev A ■ Released 2013-12 ■ ETC intends this document to be provided in its entirety.